



HR24C

Compact Undercounter Reach-in Refrigerator



HR24C
10/25/22
Item # 13556

Item #: _____
 Project: _____
 Qty: _____
 AIA#: _____

W x D x H
23.4" x 24.7" x 31.5"

ADA Compliant 



Features

- ▶ **Stainless steel interior and exterior front, sides and top**
- ▶ **UL approved for outdoor use**
- ▶ **Interior LED lighting**

- Stainless steel exterior door with aluminum interior comes standard with locks
- Field reversible door with full length tubular handle
- Magnetic door gasket is easily removable for cleaning
- Environmentally friendly insulation
- Electronic controls with LED Temperature Display and Audio/Visual Alarm
- High and low temperature alarms as well as "Door Open" alarm
- Automatic time-initiated defrost
- (3) Epoxy coated shelves standard
- 9 ft. cord and 5-15P NEMA plug
- Three year parts and labor warranty



Dimensions / Capacity

One Section HR24C

Interior Storage Capacity (CF) (AHAM)	3.87 ft ³
Overall Width x Depth (with handle)	23.4" x 26.5"
Height	31.5"
Depth with Door Open at 90°	46.7"
Adjustable Shelves	3
Shelf Dimensions (W x D)	(1) 18.5" x 17" , (2) 18.5 x 12"
Crated Weight	115 lbs.
Crated Shipping Dimensions (WxDxH)	26.8" x 24" x 36.6"

Electrical / Refrigeration

One Section HR24C

Voltage	115/60/1
HACR Breaker	15.0 Amps
Electrical Connection (NEMA)	5-15P 
Voltage Range	115-127
Ambient Temp. Range	45° to 100°F
Control Setpoint Range	34° to 52°F
Amperage	1.1
Energy Consumption (kWh/day) @ASHRAE	0.64
Heat Rejection (BTU/Hr.) @NSF	648
Approx. Nominal Compres. BTU/HR (HP)	501 (1/8HP)
Refrigerant (charge amount, oz.)	R600a (0.9 oz.)

Options

Warranty

3 Year - parts and Labor on entire machine.

Valid in United States, Canada, Puerto Rico and U.S. Territories. Contact factory for warranty in other countries.

Hoshizaki reserves the right to change specifications without notice.




HR24C

Compact Undercounter Reach-in Refrigerator




HR24C
10/25/22
Item # 13556

FRONT VIEW

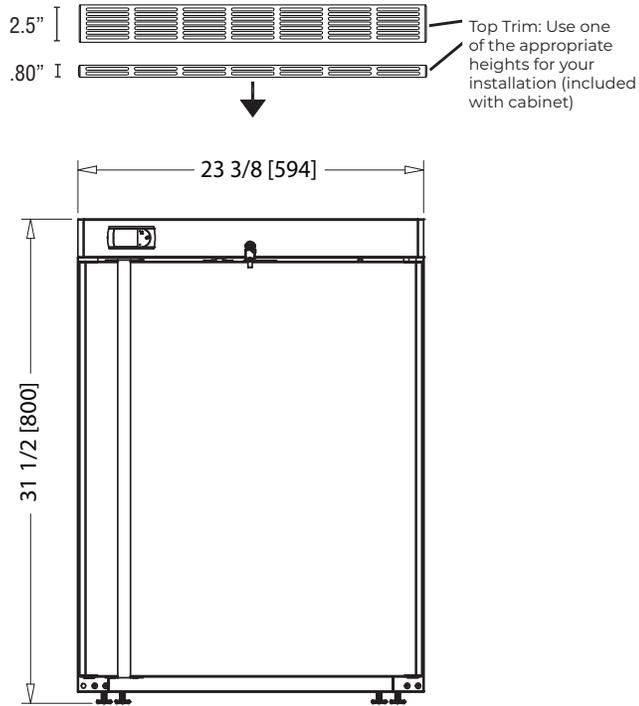

SIDE VIEW

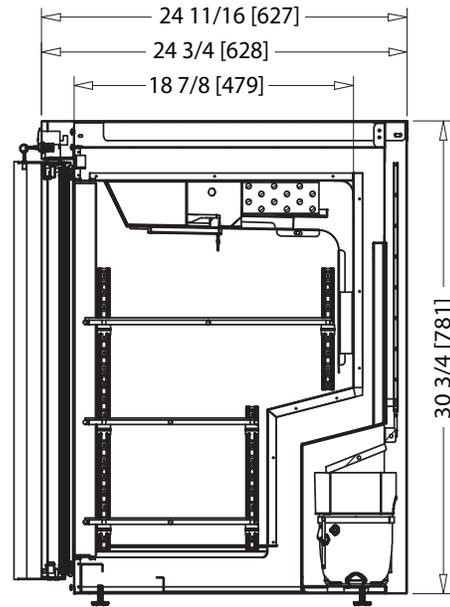

inch
[mm]

PLAN VIEW

