



Project Name: \_\_\_\_\_

Location: \_\_\_\_\_


Item #: \_\_\_\_\_ Qty: \_\_\_\_\_

Model: \_\_\_\_\_


# PHC PROOFING & HOLDING CABINETS (NON-INSULATED)

MODEL:  PHC32-10-A  PHC44-16-A  PHC60-24-A  PHC70-32-A


BevLes Combination Holding & Proofing Cabinets are constructed of aluminum and feature universal extruded pan supports that accommodate a wide variety of pans and screens. Each unit features clear Lexan doors with heavy-duty hinges, positive closing latches and full perimeter gaskets. User-friendly, bottom mounted controls feature independent heat and humidity adjustment.

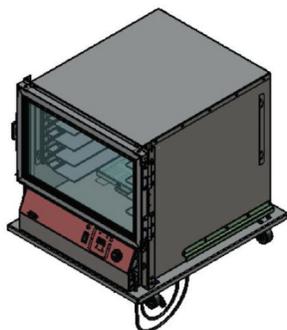


PHC32-10-A

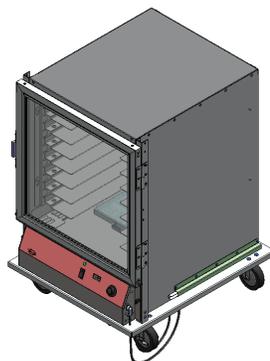

PHC44-16-A

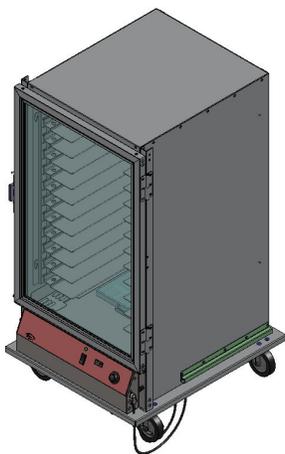

PHC60-24-A

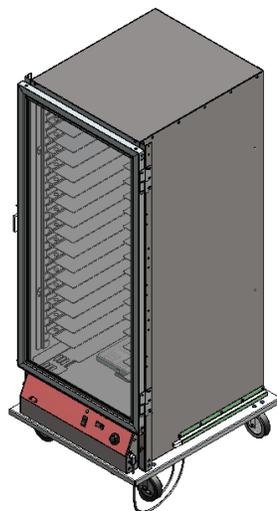

PHC70-32-A

## CONSTRUCTION

- Body: .063 Formed aluminum
- Door: clear Lexan with an extruded aluminum frame
- Door latch and hinges: positive action door latch with heavy-duty stainless steel hinges
- Door gasket: closed cell foam
- Base: .125 Formed aluminum
- Rear (air duct) panel: .063 Formed aluminum

## FEATURES

- Extruded pan supports accept a variety of pans and screens
- Removable heating module
- Easy to operate controls feature digital thermostat, variable humidity control and LED display
- Maintains uniform temperature/humidity throughout cabinet
- 5 quart (4.7 liter) cast water reservoir
- “Cast-in” humidity system prevents element burnout from water spills and potential injury from accidental contact with exposed heating element
- Temperature adjustable from 80°F (27°C) to 180°F (82.2°C)
- Self-draining feature collects excess moisture into a standard bun pan (not included) below the base of the cabinet
- Completely removable interior components make cleaning quick and easy
- Heavy-duty plate casters with 5” neoprene wheels, front two with brakes

## ELECTRIC

120V / 60Hz / 1Ph  
(208-230V / 50-60Hz / 1Ph is available as an option)  
8' NEMA 5-20P cord set included




NEMA 5-20P

## 3RD PARTY APPROVALS





# PHC PROOFING & HOLDING CABINETS (NON-INSULATED)

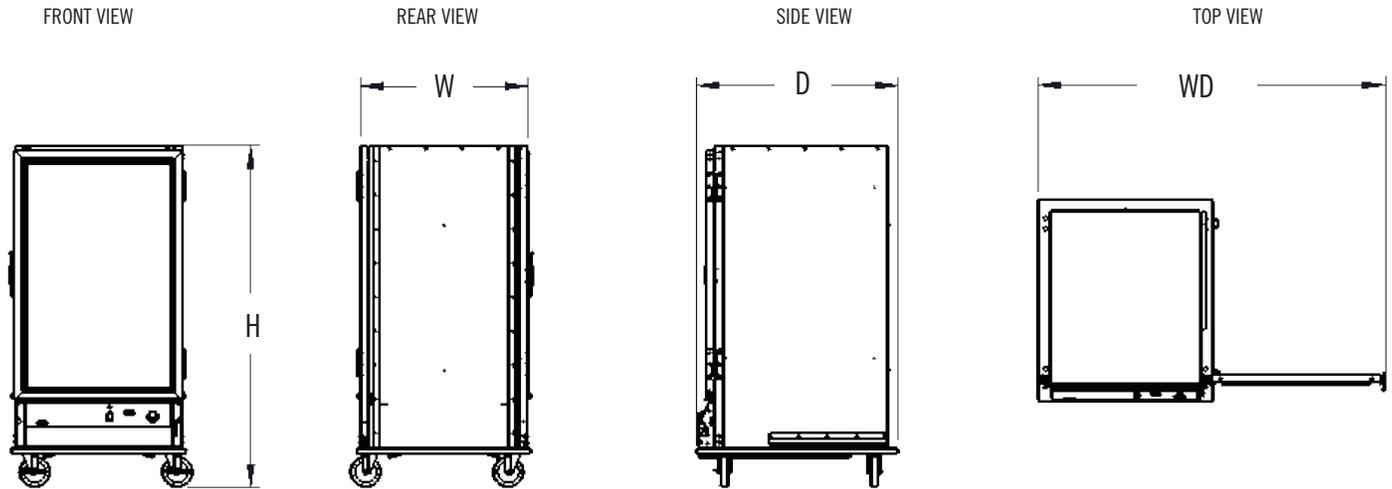

| MODEL      | CAPACITY<br>18x26 / 12x20 / *SPACING | WIDTH (W)     | DEPTH (D)       | HEIGHT (H)        | WIDTH WITH DOOR OPEN (WD) | INTERNAL HEIGHT | VOLTAGE            | WATTS | AMPS | PLUG       | UNIT WEIGHT / SHIPPING WEIGHT       | CLEARANCES             |
|------------|--------------------------------------|---------------|-----------------|-------------------|---------------------------|-----------------|--------------------|-------|------|------------|-------------------------------------|------------------------|
| PHC32-10-A | 5 / 10 / 3"                          | 29"<br>740 mm | 33.5"<br>850 mm | 31.38"<br>797 mm  | 57.5"<br>1460 mm          | 19"<br>480 mm   | 120V / 60Hz / 1 Ph | 2000  | 16.7 | NEMA 5-20P | 125 lbs / 57 kg<br>180 lbs / 82 kg  | Zero Clearance Cabinet |
| PHC44-16-A | 8 / 16 / 3"                          | 29"<br>740 mm | 33.5"<br>850 mm | 43.06"<br>1094 mm | 57.5"<br>1460 mm          | 28"<br>710 mm   | 120V / 60Hz / 1 Ph | 2000  | 16.7 | NEMA 5-20P | 155 lbs / 70 kg<br>205 lbs / 93 kg  | Zero Clearance Cabinet |
| PHC60-24-A | 12 / 24 / 3"                         | 29"<br>740 mm | 33.5"<br>850 mm | 56.5"<br>1440 mm  | 57.5"<br>1460 mm          | 41"<br>1040 mm  | 120V / 60Hz / 1 Ph | 2000  | 16.7 | NEMA 5-20P | 185 lbs / 84 kg<br>235 lbs / 107 kg | Zero Clearance Cabinet |
| PHC70-32-A | 16 / 32 / 3"                         | 29"<br>740 mm | 33.5"<br>850 mm | 71.5"<br>1820 mm  | 57.5"<br>1460 mm          | 57"<br>1450 mm  | 120V / 60Hz / 1Ph  | 2000  | 16.7 | NEMA 5-20P | 215 lbs / 98 kg<br>265 lbs / 120 kg | Zero Clearance Cabinet |

\* Adjustable on 1.50" centers. Also accommodates 19" x 19" and 23" x 23" screens

## AVAILABLE OPTIONS & ACCESSORIES

- Reverse door hinging
- Solid door
- Corner bumpers of gray non-marking vinyl (set of 4)
- Perimeter bumper of gray non-marking vinyl
- Additional extruded universal pan supports
- 6" stainless steel legs with adjustable feet for stationary floor installation \*
- 6" casters with soft rubber wheels
- 18" x 26" chrome electroplated wire racks